



## Download & Install OPOS 2.67e.

[Click here to Download OPOS2.67.e](#)

1. Click Open.

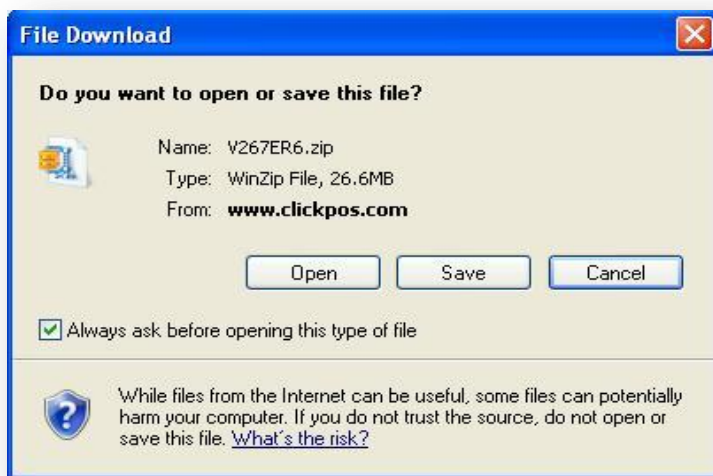


2. Unzip To C:\EPSON2.6.

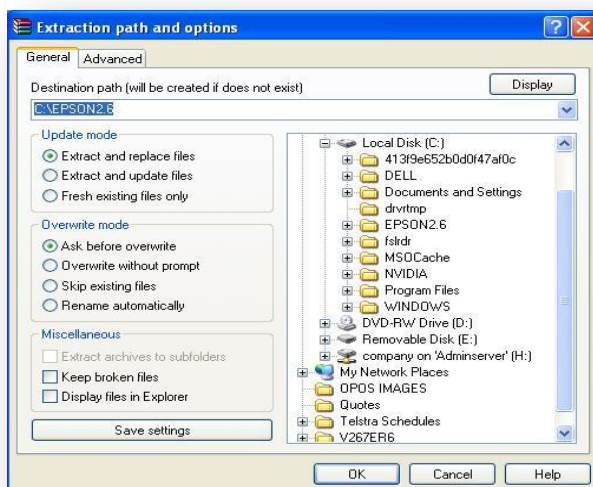


3. Open my Computer.


4. Browse to C:\EPSON2.6\V267ER6\Disk1.
5. Click **Setup.exe**.
6. Click Next.

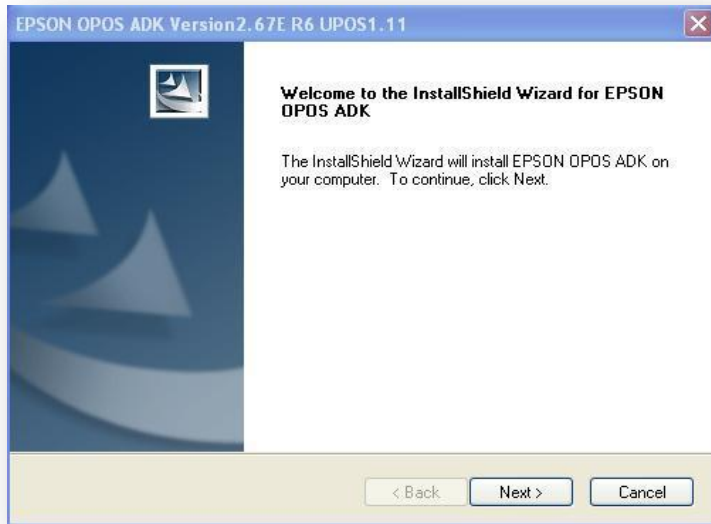


7. Accept Terms & Conditions, then follow by clicking Next.

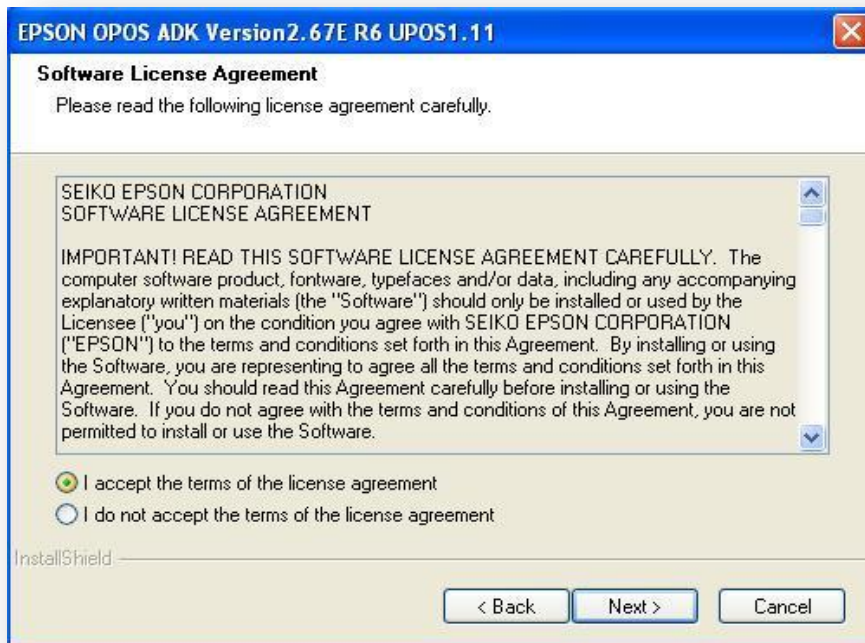

8. Ensure No Registry File is selected, proceed by clicking Next.

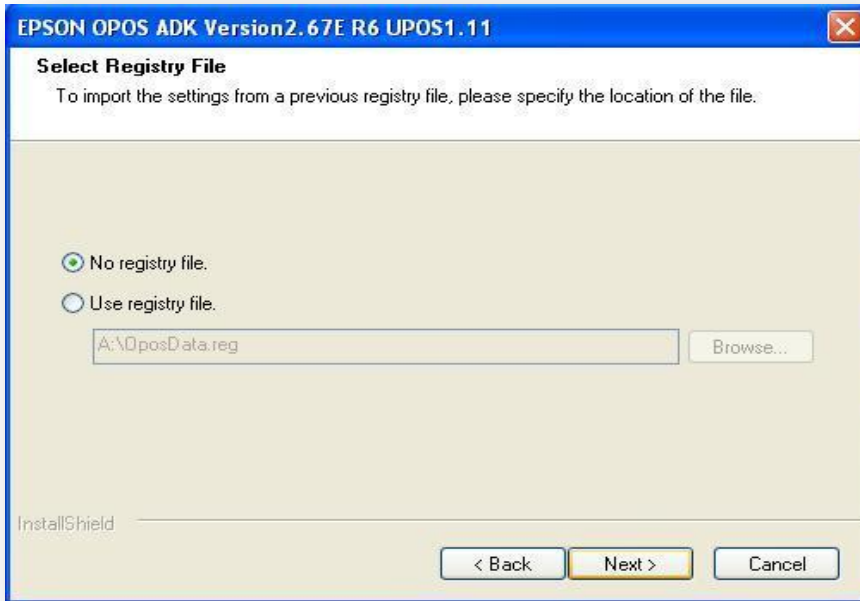


9. Select User, then click Next.

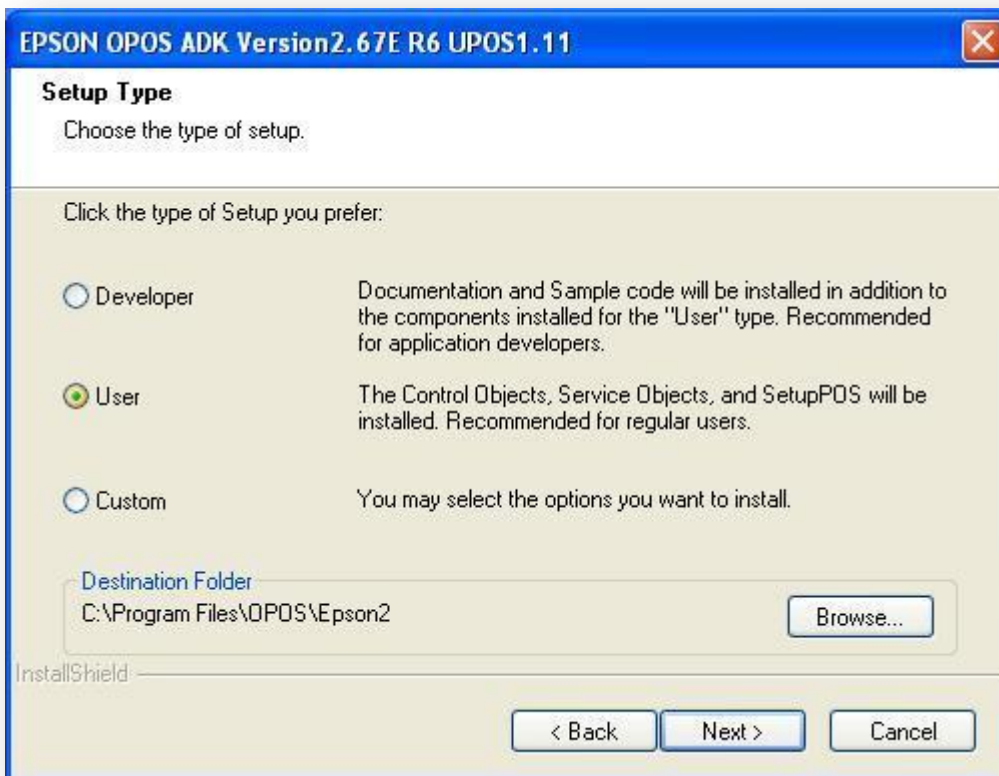

10. Click Next.


11. Select Correct Port and click Next

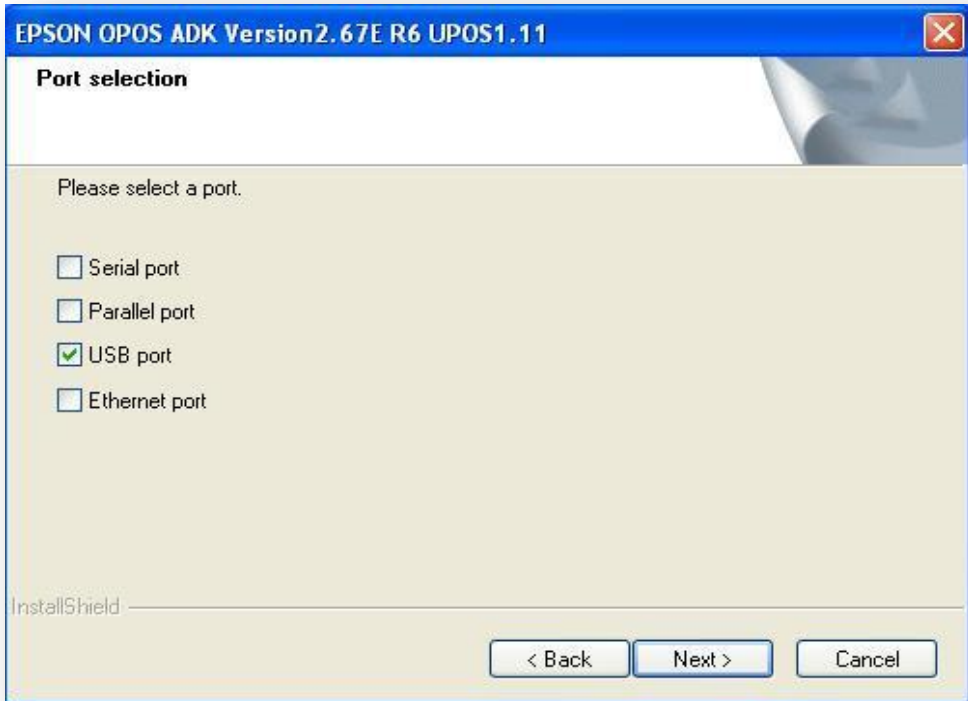


12. Click Finish to Complete.

## T88 USB Printer Setup

1. To open OPOS navigate to Start → Programs → OPOS → SetupPOS ver 2.00.

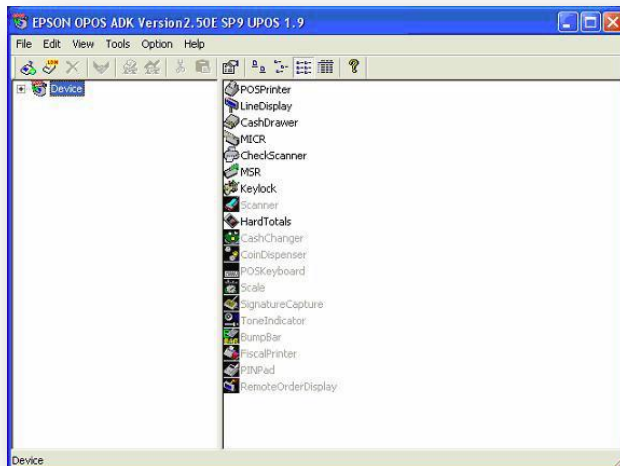


2. Right Click "POSPrinter".
3. Click "Add New Device".

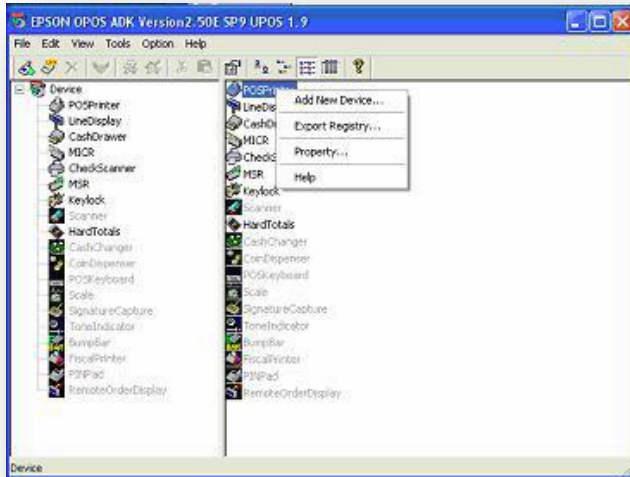


4. Select TM-T88 (followed by your model number, either ii, iii, iv) under “**Select Device Name**”.
5. Select TM-T88iiiU (U is for USB models).

Please Note **USB** models will end with a **U**  
 Please Note **COM** models will not have a trailing letter  
 Please Note **LPT** models will end with a **P**


6. Enter **EPSONPOS** into “**Add New LDN**”.
7. Ensure Printer is connected & turned on.
8. Click “**Next**”.

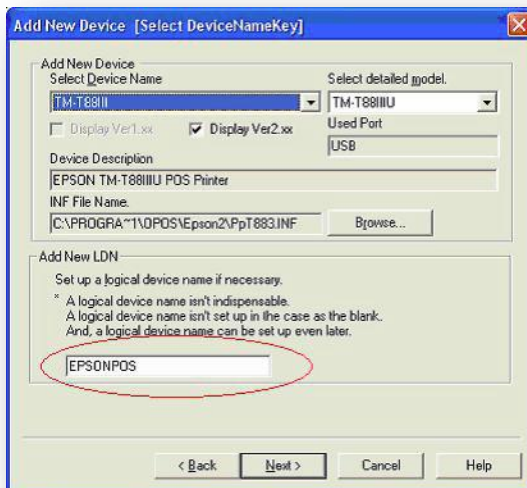


9. Click Check Health Interactive then start.

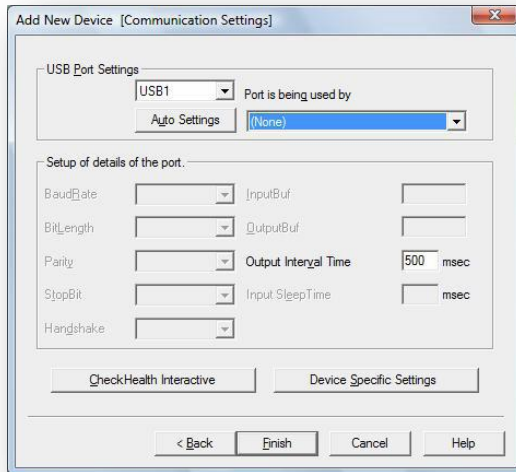

10. If you receive an error or the below dialogue does not appear then there will be an issue in the communication between the PC and the printer.
  - Check PC cables
  - Ensure the terminal is switched on & ready (ready light)
  - If no success after checking the above, call ClickPOS support on + 61 3 9092 5300
11. If Successful, click Start.

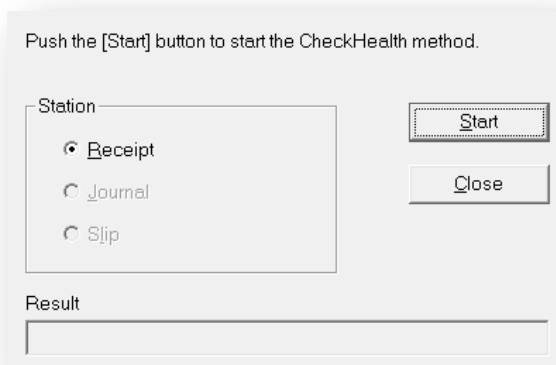


12. Your T88 should now print a test stub
13. Reboot PC if successful

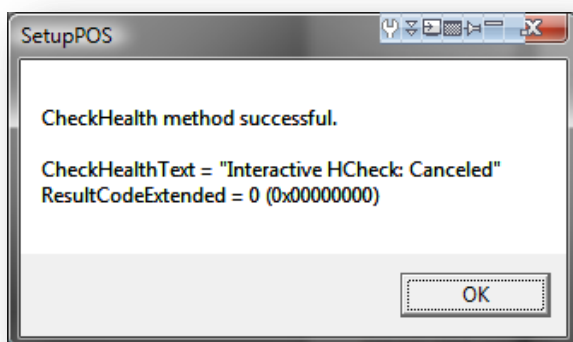


# T88 Ethernet Printer Setup (Shared Network)

- The Ethernet version allows multiple users to share the same pos printer.
- **Please Note: You are limited to 1 cash-drawer per printer.**


1. To open OPOS navigate to Start → Programs → OPOS → SetupPOS ver 2.00

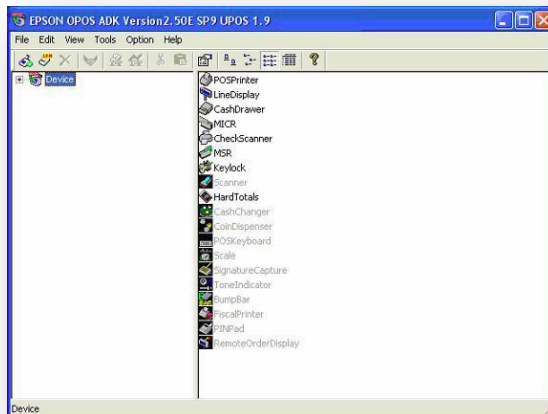


2. Right Click "POSPrinter".
3. Click "Add New Device".

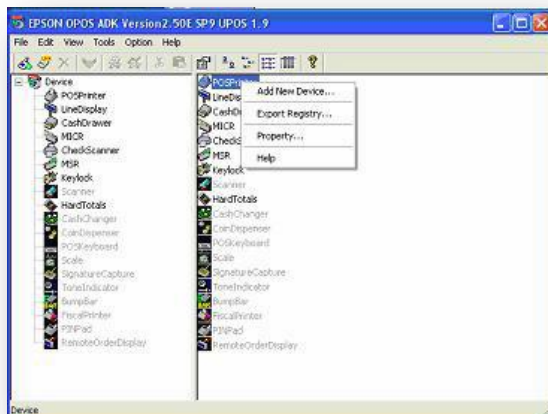


4. Select TM-T88 (followed by your model number, either ii, iii, iv) under "Select Device Name".
5. Select TM-T88iiiE (E is for Ethernet models).
6. Enter **EPSONPOS** into "Add New LDN".
7. Ensure Printer is connected & turned on.
8. Click "Next".

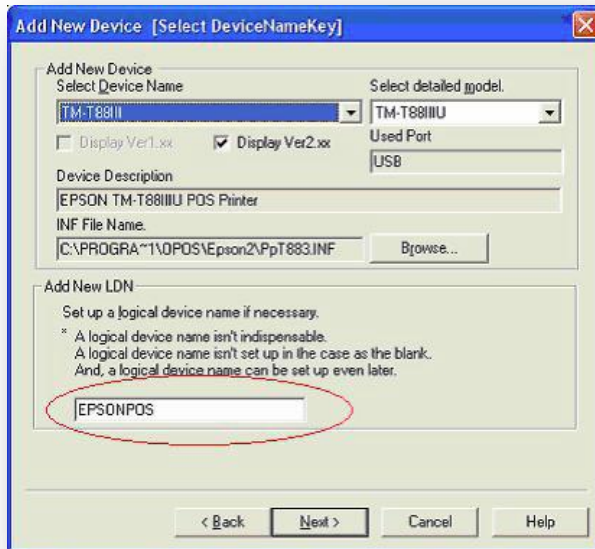

9. Enter the IP address of the printer that has been assigned by your router.
10. Click Next
11. Click Check Health Interactive, then start.
12. If you receive an error, click back and check everything again.
13. If Successful, click Start.

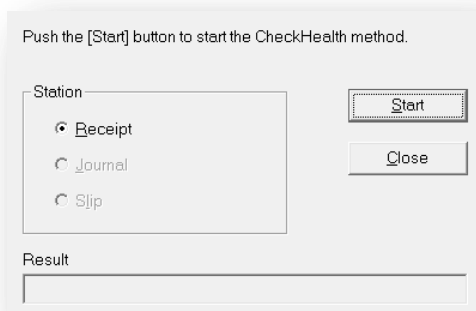


14. Your T88 should now print a test stub
15. Reboot PC if successful

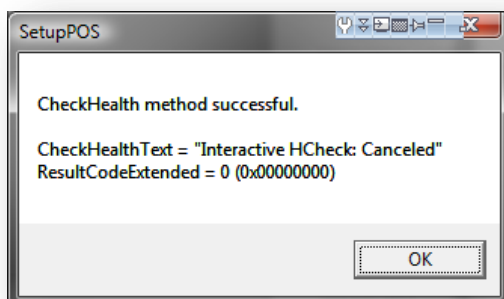




# Compatible Cash-Drawer Setup

1. If OPOS is not open, start it from your "Start" menu in Windows.
2. Click Start > OPOS > SetupPOS ver2.00.
3. Right click CashDrawer and click Add New Device.
  - **Note:** The steps here were conducted with an Epson Cash Drawer with a 6-pin RJ Connector.
  - **Note:** If you have an Epson Cash Drawer with a 6-pin RJ Connector,
  - You must connect the cash drawer to the back of the receipt printer now.

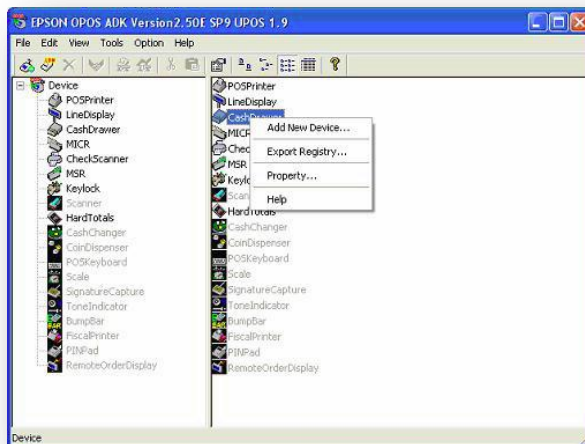

4. Select the type of the cash drawer used.
  - In most situations "StandardU" will be selected in the "detailed model" field – USB Model.
  - If using Ethernet – StandardE.
  - If using Parallel - StandardP.
  - If using Serial – Standard.
5. Enter EPSONCASH into the LDN field.
6. Click Next.

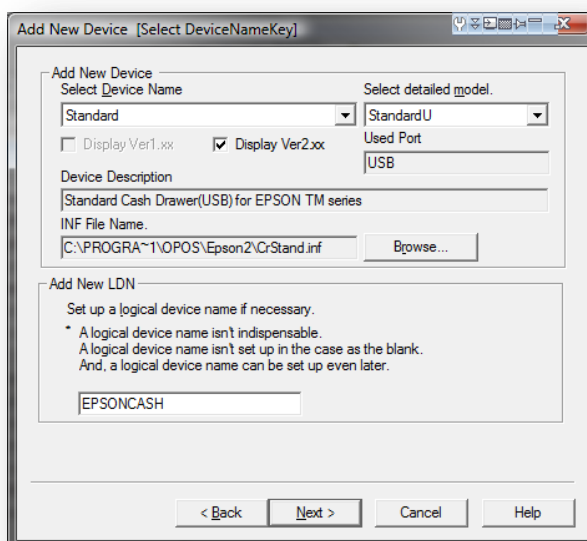

7. Click "Check Health Interactive".

8. Click Start to test the cash drawer.
  - If below dialogue does not appear then there will be an issue in the communication between the PC and the printer.
  - Check PC cables.
  - Ensure the terminal is switched on & ready (ready light).
  - If no success after checking the above, call ClickPOS support on + 61 3 9092 5300.
9. If successful the cash drawer will open.
10. Reboot PC.